

Dot laser, green, 532 nm, 15 mW

DA532-15-5-F(22x80)-CON
Order Number: 70133585

Main Parameters (*)	min	typ	max	Unit
Wavelength		532		nm
Optical Output Power		15		mW
Operating Voltage	4.5	5	5.5	V DC
Operating Current	125	250	375	mA
Operating Temperature	15		30	°C
Storage Temperature	-40		80	°C

Main Data

Warranty	1 years
----------	---------

Technical Parameters

Lifetime	> 5,000 h
RoHS	yes

Optical Parameters

Beam Shape	Dot
Laser Class	3B
Divergence	A - 0.1 mrad
Size of Laserdot	adjustable
Operating Distance	250 m
Optics	glass lens AR coated
Beam Mode	TEM00
Laser technology	YVO4+KTP
Stability	+/- 20% @ 15-30°C
Focus	adjustable
Warm up time	< 15 min

Electrical Parameters

Potential of Housing	isolated
Connector	2.1 mm DC plug (GND pole inner)
Power Supply	Power Supply with stripped/tinned wires, Output: 5V DC, Input: 100-240V AC, 50-60Hz, Output Power: 3W max.

Mechanical Parameters

Size	Ø22x80 mm
Material	aluminium
Cable length	100 mm
Output Aperture	5 mm
Housing Color	black
Weight	68 g

(*) Over the complete operating temperature range

Features



- Operating Voltage 5 V DC
- Laser Class 3B
- Adjustable focus
- Compact size
- Glas lenses anti reflex coated


Picture



Cable color

Ground		blue	GND
Positive		red	4.5 - 5.5, typ 5 V DC

Drawing

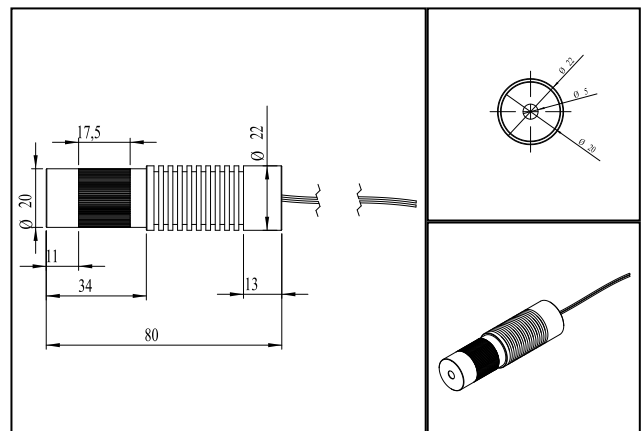

Safety Label



Valid Revision

| 19-JUL-2019