

Dot laser, green, 532 nm, 50 mW

DA532-50-5(85x50x40)
Order Number: 70107135

Main Parameters (*)	min	typ	max	Unit
Wavelength		532		nm
Optical Output Power		50		mW
Operating Voltage	4.5	5	5.5	V DC
Operating Current	250	500	750	mA
Operating Temperature	15		30	°C
Storage Temperature	-40		80	°C

Main Data

Warranty	1 years
----------	---------

Technical Parameters

Lifetime	> 10,000 h
RoHS	yes

Optical Parameters

Beam Shape	Dot
Laser Class	3B
Divergence	A - 0.1 mrad
Beam Diameter	5 mm
Size of Laserdot	4mm@10m
Operating Distance	300 m
Optics	glass lens AR coated
Beam Mode	TEM00
Laser technology	YVO4+KTP
Stability	+/- 20% @ 15-30°C
Focus	collimated
Warm up time	< 15 min

Electrical Parameters

Potential of Housing	isolated
----------------------	----------

Mechanical Parameters

Size	50x85x40 mm
Material	aluminium
Cable length	100 mm
Output Aperture	5 mm
Weight	320 g

(*) Over the complete operating temperature range

Features



- Operating Voltage 5 V DC
- Laser Class 3B
- Glas lenses anti reflex coated
- High Power
- Small laser head


Picture



Cable color

Ground		blue	GND
Positive		red	4.5 - 5.5, typ 5 V DC

Drawing

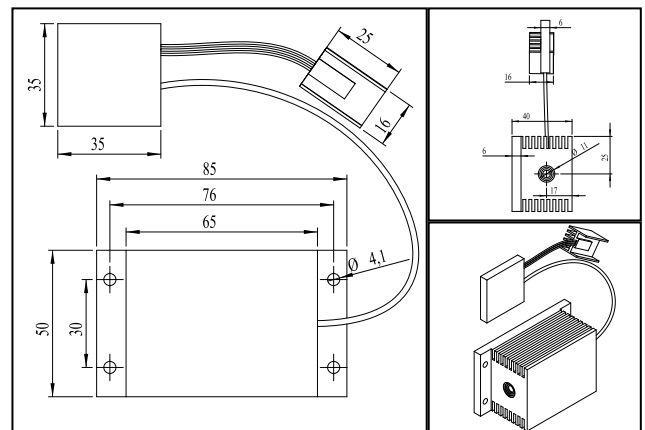

Safety Label



Valid Revision

2 | 26-AUG-2019