

Dot laser, green, 520 nm, 1 mW

DB520-1-3-FA(14x45)-AP-QCW
Order Number: 70127010

Main Parameters (*)	min	typ	max	Unit
Wavelength		520		nm
Optical Output Power		1		mW
Operating Voltage	2.7	3	3.3	V DC
Operating Current	100	150	200	mA
Operating Temperature	-10		60	°C
Storage Temperature	-40		80	°C

Main Data

Warranty	1 years
----------	---------

Technical Parameters

Lifetime	>6,000 h
RoHS	yes

Optical Parameters

Beam Shape	Dot
Laser Class	2
Divergence	B - 0.3 mrad
Beam Diameter	5 mm
Size of Laserdot	<3..4mm@10m
Operating Distance	80 m
Optics	glass lens AR coated
Laser technology	Single Mode Diode
Axial Divergence	±0.3°
Focus	fixed (10.0m)
internal modulation frequency	1 kHz

Electrical Parameters

Potential of Housing	isolated
Power Supply	Power Supply with stripped/tinned wires, Output: 3.3V DC, Input: 100-240V AC, 50-60Hz, Output Power: 3.3W max.

Mechanical Parameters

Size	Ø14x45 mm
Material	aluminium
Cable length	200 mm
Wire type	Belden, Typ 1007, 26AWG
Output Aperture	5 mm
Housing Color	silver
Weight	18 g
Stripping of wire	5 mm

(*) Over the complete operating temperature range

Features



- Operating Voltage 3V DC
- Image processing
- Small laser head
- Laser Class 2
- Axial parallel


Picture



Cable color

Ground		black	GND
Positive		red	2.7 - 3.3, typ 3 V DC

Drawing

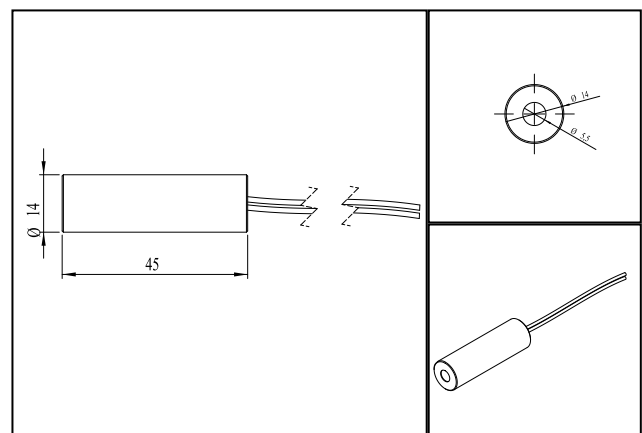

Safety Label



Valid Revision

| 21-OCT-2019