

Dot laser, red, 650 nm, 0.25 mW

DD650-0.25-4(14x30)-AP-CON
Order Number: 70140613

Main Parameters (*)	min	typ	max	Unit
Wavelength	645	650	660	nm
Optical Output Power	0.22	0.25	0.28	mW
Operating Voltage	3.5	4	4.5	V DC
Operating Current		9		mA
Operating Temperature	-10		50	°C
Storage Temperature	-40		60	°C

Main Data

Warranty	1 years
----------	---------

Technical Parameters

Lifetime	> 50,000 h
RoHS	yes

Optical Parameters

Beam Shape	Dot
Laser Class	1
Divergence	D - 0.5 mrad
Beam Diameter	3 mm
Operating Distance	10 m
Optics	glass lens AR coated
Laser technology	Single Mode Diode
Opt. Power Stability at const. Temp.	< 1 %
Stability	< 8 % @ -10 - 50 °C
Axial Divergence	± 2 °
Focus	collimated
Pointing Stability	< 0.2 °

Electrical Parameters

Rise Time	< 100 ms
Potential of Housing	isolated
ESD Protection	IEC 61000-4-2
Connector	Molex PicoBlade

Mechanical Parameters

Size	Ø14x30 mm
Material	aluminium
Cable length	150 mm
Wire type	Belden, Typ 1095, 28AWG
Output Aperture	3 mm
Housing Color	black
Weight	11.3 g

(*) Over the complete operating temperature range

Features



- Operating Voltage 4 V DC
- Laser Class 1
- Image processing
- Glas lenses anti reflex coated
- Uniform illumination


Picture



Cable color

Ground		blue	GND
Positive		red	3.5 - 4.5, typ 4 V DC

Drawing

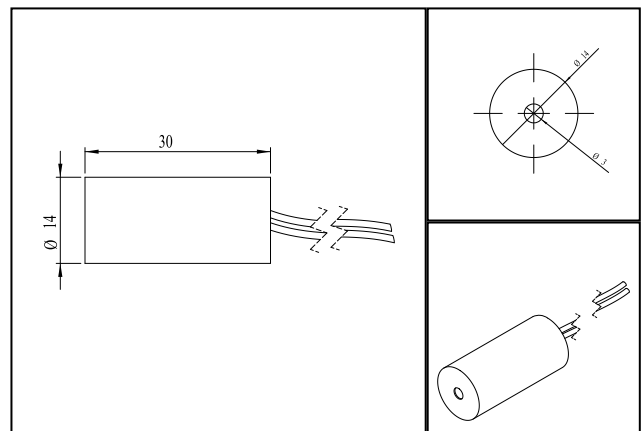

Safety Label



Valid Revision

| 27-MAY-2020