

Doe laser, red, 650nm, 5mW

DD650-5-3(12x38)-DOE

Order Number: 70114775

Main Parameters (*)	min	typ	max	Unit
Wavelength		650		nm
Optical Output Power		5		mW
Operating Voltage	2.7	3	3.3	V DC
Operating Current	20	40	60	mA
Operating Temperature	-20		50	°C
Storage Temperature	-40		80	°C

Technical Parameters

Lifetime	>10000h
RoHS	yes

Optical Parameters

Beam Shape	DOE
Laser Class	3R
Divergence	D - 0.5mrad
Operating Distance	50m
Optics	glass lens AR coated
Laser technology	diode
Focus	adjustable

Electrical Parameters


Potential of Housing	isolated
Power Supply	LFNT-3

Mechanical Parameters

Size	Ø12x38mm
Material	aluminium
Cable length	100mm
Wire type	26AWG, 0,14mm ²
Output Aperture	5mm
Weight	9.5g

(*) Over the complete operating temperature range

Features





- Adjustable focus
- DOE optic can be changed
- Compact size
- Glas lenses anti reflex coated
- Operating Voltage 3V DC


Picture




Cable Colors

Ground		black	GND
Positive		red	2.7 - 3.3, typ 3V DC

Drawing

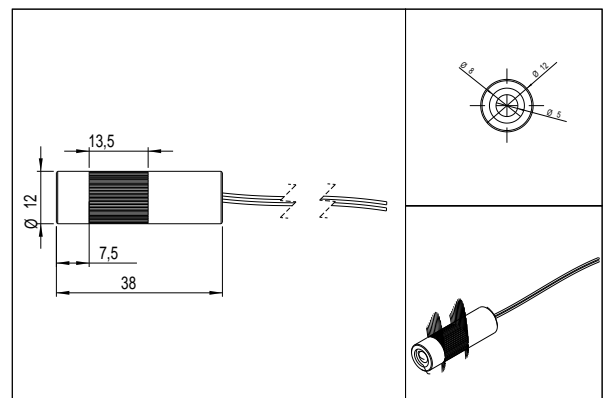

Safety Label



Revision

REV 1 | 14-JAN-2016