

Dot laser, red, 658 nm, 10 mW

DD658-10-5-F(12x60)-POTI
Order Number: 70120196

Main Parameters (*)	min	typ	max	Unit
Wavelength		658		nm
Optical Output Power	1	10	10	mW
Operating Voltage	4.5	5	5.5	V DC
Operating Current	50	100	150	mA
Operating Temperature	-20		50	°C
Storage Temperature	-40		80	°C

Main Data

Warranty	1 years
----------	---------

Technical Parameters

Lifetime	> 5,000 h
RoHS	yes

Optical Parameters

Beam Shape	Dot
Laser Class	3B
Divergence	D - 0.5 mrad
Size of Laserdot	adjustable
Operating Distance	100 m
Optics	glass lens AR coated
Laser technology	Single Mode Diode
Focus	adjustable

Electrical Parameters

Potential of Housing	isolated
Power Supply	Power Supply with stripped/tinned wires, Output: 5V DC, Input: 100-240V AC, 50-60Hz, Output Power: 3W max.

Mechanical Parameters

Size	Ø12x60 mm
Material	aluminium
Cable length	100 mm
Wire type	26AWG, 0,14mm ²
Output Aperture	2 mm
Housing Color	black
Weight	15.5g

(*) Over the complete operating temperature range

Features



- Operating Voltage 5V DC
- Adjustable focus
- Laser Class 2
- Compact size
- Modulated


Picture



Cable color

Ground		black	GND
Positive		red	4.5 - 5.5, typ 5 V DC

Drawing

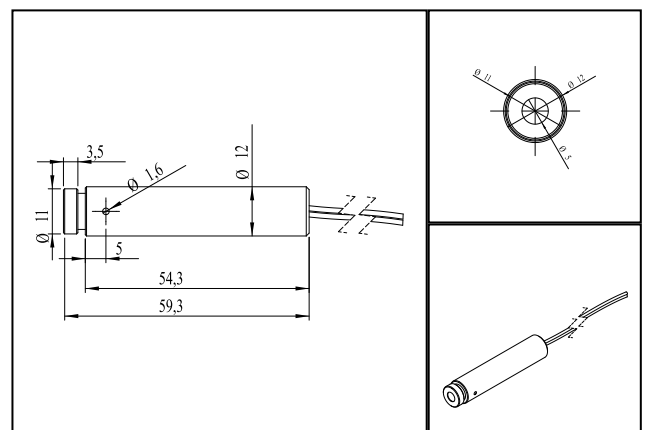

Safety Label



Valid Revision

| 05-JAN-2017