

Dot laser, red, 635 nm, 0.4 mW

DI635-0.4-5(8x21)-AP-F294
Order Number: 70120301

Main Parameters (*)	min	typ	max	Unit
Wavelength		635		nm
Optical Output Power		0.4		mW
Operating Voltage	4.5	5	5.5	V DC
Operating Current	20	35	55	mA
Operating Temperature	-20		50	°C
Storage Temperature	-40		80	°C

Main Data

Warranty	1 years
----------	---------

Technical Parameters

Lifetime	> 5,000 h
RoHS	yes

Optical Parameters

Beam Shape	Dot
Laser Class	1
Divergence	1 - 1.5 mrad
Beam Diameter	2 mm
Size of Laserdot	0.4mm@0.294m
Operating Distance	0.294 m
Optics	glass lens AR coated
Laser technology	diode
Axial Divergence	± 0.1 °
Focus	fixed (294mm)

Electrical Parameters

Power Supply	Power Supply with stripped/tinned wires, Output: 5V DC, Input: 100-240V AC, 50-60Hz, Output Power: 3W max.
--------------	--

Mechanical Parameters

Size	Ø8x21 mm
Material	aluminium
Cable length	100 mm
Output Aperture	2 mm
Housing Color	silver
Weight	3 g

(*) Over the complete operating temperature range

Features



- Axial parallel
- Glas lenses anti reflex coated
- Compact size
- Laser Class 1
- Operating Voltage 5V DC


Picture



Cable color

Ground		black	GND
Positive		red	4.5 - 5.5, typ 5 V DC

Drawing

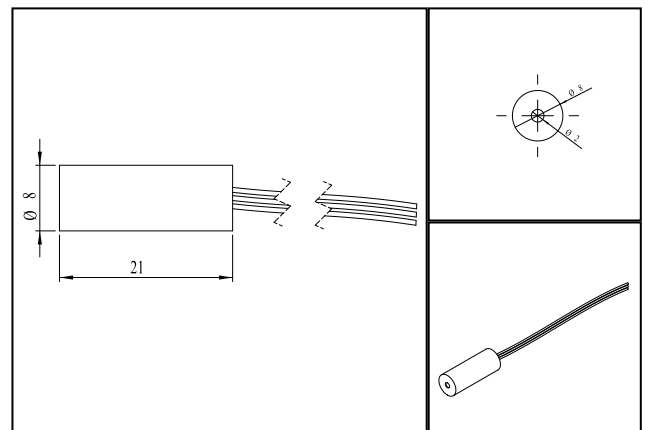

Safety Label



Valid Revision

| 02-SEP-2022