

Dot laser, red, 650 nm, 0.4 mW

DI650-0.4-3(8x21)
Order Number: 70104264

Main Parameters (*)	min	typ	max	Unit
Wavelength		650		nm
Optical Output Power		0.4		mW
Operating Voltage	2.7	3	3.3	V DC
Operating Current	10	20	30	mA
Operating Temperature	-20		50	°C
Storage Temperature	-40		80	°C

Main Data

Warranty	1 years
----------	---------

Technical Parameters

Lifetime	> 10,000 h
RoHS	yes

Optical Parameters

Beam Shape	Dot
Laser Class	1
Divergence	1 - 1.5 mrad
Beam Diameter	2 mm
Size of Laserdot	<3..5mm@5m
Operating Distance	5 m
Optics	glass lens AR coated
Laser technology	diode
Focus	fixed (5.0m)

Electrical Parameters

Potential of Housing	isolated
Power Supply	Power Supply with stripped/tinned wires, Output: 3.3V DC, Input: 100-240V AC, 50-60Hz, Output Power: 3.3W max.

Mechanical Parameters

Size	Ø8x21 mm
Material	aluminium
Cable length	100 mm
Output Aperture	2 mm
Housing Color	black
Weight	3 g

(*) Over the complete operating temperature range

Features



- Operating Voltage 3V DC
- Laser Class 1
- Fixed focus
- For medical devices
- Compact size


Picture



Cable color

Ground		blue	GND
Positive		red	2.7 - 3.3, typ 3 V DC

Drawing

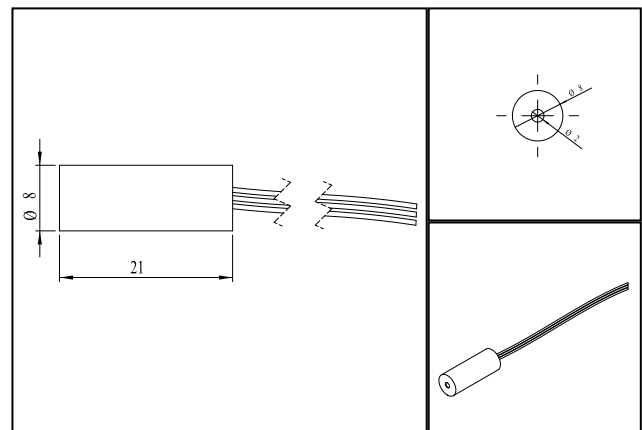

Safety Label



Valid Revision

3 | 04-APR-2025