

Dot laser, red, 650 nm, 0.4 mW

DI650-0.4-5(8x21)-AP
Order Number: 70152159

Main Parameters (*)	min	typ	max	Unit
Wavelength	640	650	660	nm
Optical Output Power	0.3	0.4	0.4	mW
Operating Voltage	4.5	5	5.5	V DC
Operating Current	5	15	25	mA
Operating Temperature	-20		50	°C
Storage Temperature	-40		80	°C

Main Data

Warranty	1 years
----------	---------

Technical Parameters

Lifetime	> 5,000 h
RoHS	yes

Optical Parameters

Beam Shape	Dot
Laser Class	1
Divergence	1 - 1.5 mrad
Beam Diameter	2 mm
Size of Laserdot	<3..5mm@5m
Operating Distance	10 m
Optics	glass lens AR coated
Laser technology	Single Mode Diode
Axial Divergence	± 0.15 °
Focus	collimated

Electrical Parameters

Potential of Housing	isolated
Power Supply	Power Supply with stripped/tinned wires, Output: 5V DC, Input: 100-240V AC, 50-60Hz, Output Power: 3W max.

Mechanical Parameters

Size	Ø8x21 mm
Material	aluminium
Cable length	100 mm
Wire type	26AWG, 0,14mm ²
Output Aperture	2.5 mm
Housing Color	silver
Weight	3 g

(*) Over the complete operating temperature range

Features



- Axial parallel
- Low power consumption
- Compact size
- Laser Class 1
- Operating Voltage 5 V DC


Picture



Cable color

Ground		blue	GND
Positive		red	4.5 - 5.5, typ 5 V DC

Drawing

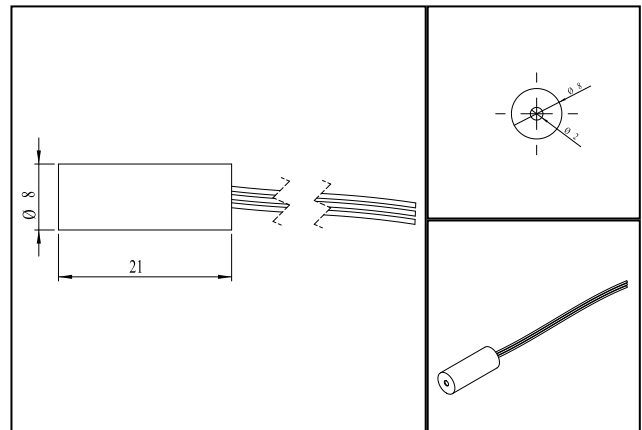

Safety Label



Valid Revision

| 31-AUG-2022