

Dot laser, red, 650 nm, 0.5 mW

DI650-0.5-5(8x21)-F100
Order Number: 70103960

Main Parameters (*)	min	typ	max	Unit
Wavelength		650		nm
Optical Output Power		0.5		mW
Operating Voltage	4.5	5	5.5	V DC
Operating Current	15	25	40	mA
Operating Temperature	-20		50	°C
Storage Temperature	-40		80	°C

Main Data

Warranty	1 years
----------	---------

Technical Parameters

Lifetime	> 5,000 h
RoHS	yes

Optical Parameters

Beam Shape	Dot
Laser Class	2
Divergence	1 - 1.5 mrad
Size of Laserdot	<0.3mm@0.1m
Operating Distance	0.1 m
Optics	glass lens AR coated
Laser technology	diode
Focus	fixed (100mm)

Electrical Parameters

Potential of Housing	isolated
Power Supply	Power Supply with stripped/tinned wires, Output: 5V DC, Input: 100-240V AC, 50-60Hz, Output Power: 3W max.

Mechanical Parameters

Size	Ø8x21 mm
Material	aluminium
Cable length	100 mm
Output Aperture	2 mm
Weight	2.6 g

(*) Over the complete operating temperature range

Features



- Glas lenses anti reflex coated
- Laser Class 2
- Operating Voltage 5V DC
- Fixed focus


Picture



Cable color

Ground		green	GND
Positive		red	4.5 - 5.5, typ 5 V DC

Drawing

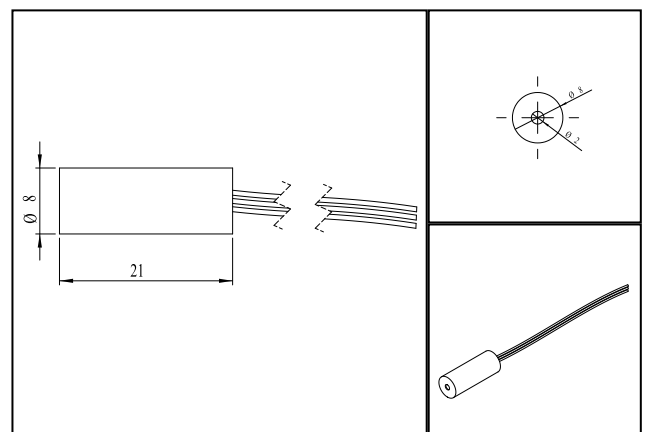

Safety Label



Valid Revision

3 | 12-JUL-2022