

Doe laser, red, 635 nm, 1 mW

DOE205-635-1-3(12x38)-C1500
Order Number: 70128833

Main Parameters (*)	min	typ	max	Unit
Wavelength		635		nm
Optical Output Power		1		mW
Operating Voltage	2.7	3	3.3	V DC
Operating Current	15	30	45	mA
Operating Temperature	-20		50	°C
Storage Temperature	-40		80	°C

Main Data

Warranty	1 years
----------	---------

Technical Parameters

Lifetime	> 5,000 h
RoHS	yes

Optical Parameters

Beam Shape	DOE
Laser Class	1M
Divergence	D - 0.5 mrad
Operating Distance	10 m
Optics	glass lens AR coated
Laser technology	Single Mode Diode
Focus	adjustable

Electrical Parameters

Potential of Housing	isolated
Power Supply	Power Supply with stripped/tinned wires, Output: 3.3V DC, Input: 100-240V AC, 50-60Hz, Output Power: 3.3W max.
Stripping of cable cover	50 mm

Mechanical Parameters

Size	Ø12x38 mm
Material	aluminium
Cable length	1,500 mm
Wire type	18AWG, black, 3,6mm
Output Aperture	5 mm
Housing Color	black
Weight	21 g
Stripping of wire	5 mm

(*) Over the complete operating temperature range

Features




- Laserklasse 2
- Kompakte Bauform
- Verstellbarer Fokus
- Für 8mm DOE geeignet


Picture



Cable color

Ground		black	GND
Positive		white	2.7 - 3.3, typ 3 V DC

Drawing

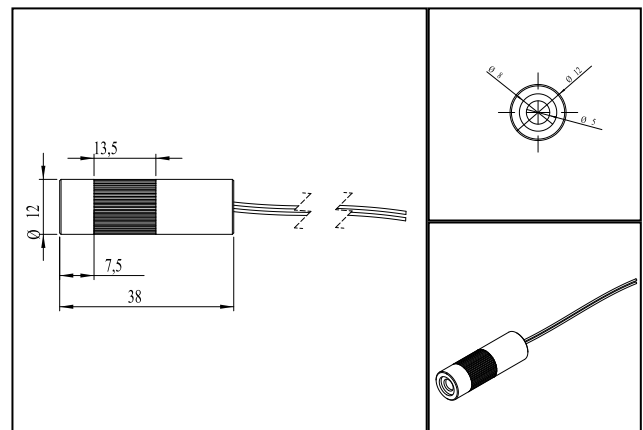

Safety Label



Valid Revision

| 30-OCT-2020