

DOE laser, red, 635 nm, 1 mW

DOE213-635-1-6(10x22)
Order Number: 70111651

Main Parameters (*)	min	typ	max	Unit
Wavelength		635		nm
Optical Diode Power		1		mW
Operating Voltage	3	5	6	V DC
Operating Current	20	30	45	mA
Operating Temperature	-20		50	°C
Storage Temperature	-40		80	°C

Main Data

Warranty 1 years

Technical Parameters

Lifetime >3,000 h
RoHS yes

Optical Parameters

Beam Shape DOE
Laser Class 2M
Divergence H - 1.0 mrad
Optics acryl lens
Laser technology diode
Protection Lens yes
Focus fixed

Electrical Parameters

Potential of Housing VDD(+)

Mechanical Parameters

Size Ø10x22 mm
Material Brass
Cable length 100 mm
Wire type 26AWG, 0,14mm²
Output Aperture 6 mm
Weight 8.5 g

DOE

Alpha 41.8°
Beta 30.3°
Gamma 3°
Delta 30.3°
a 76.3 mm
b 54.1 mm
c 5.4 mm

d	54.1 mm
Diameter (without holder)	8 mm
Width (without Holder)	1.2 mm
Material	PC

(*) Over the complete operating temperature range


Picture



Cable color

Ground  black GND
Positive  red 3 - 6, typ 5 V DC

Drawing

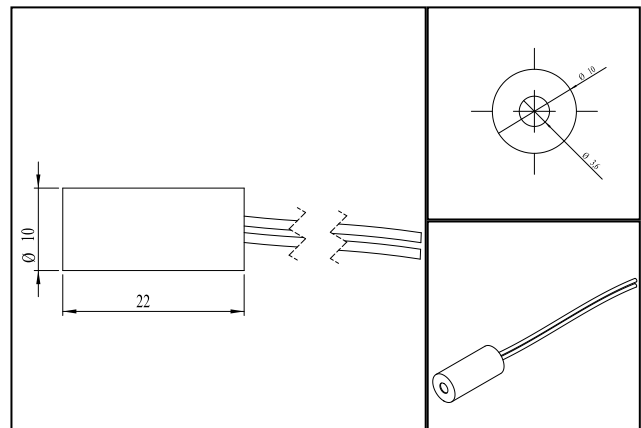

Safety Label



Valid Revision

1 | 28-SEP-2022