

Doe laser, red, 650 nm, 5 mW

DOE256-650-5-3(12x38)
Order Number: 70117660

Main Parameters (*)	min	typ	max	Unit
Wavelength		650		nm
Optical Output Power		5		mW
Operating Voltage	2.7	3	3.3	V DC
Operating Current	20	40	60	mA
Operating Temperature	-20		50	°C
Storage Temperature	-40		80	°C

Main Data

Warranty	1 years
----------	---------

Technical Parameters

Lifetime	> 10,000 h
RoHS	yes

Optical Parameters

Beam Shape	DOE
Laser Class	1
Divergence	D - 0.5 mrad
Operating Distance	50 m
Optics	glass lens AR coated
Laser technology	diode
Focus	adjustable

Electrical Parameters

Potential of Housing	isolated
Power Supply	Power Supply with stripped/tinned wires, Output: 3.3V DC, Input: 100-240V AC, 50-60Hz, Output Power: 3.3W max.

Mechanical Parameters

Size	Ø12x38 mm
Material	aluminium
Cable length	100 mm
Wire type	26AWG, 0,14mm ²
Output Aperture	5 mm
Weight	9.5 g

DOE

Alpha	31°
Beta	22°
Gamma	0.44°
Delta	22°
Diameter (without holder)	8 mm
Width (without Holder)	1.2 mm

Material PC

(*) Over the complete operating temperature range

Features



- Adjustable focus
- DOE optic can be changed
- Compact size
- Glas lenses anti reflex coated
- Operating Voltage 3 V DC


Picture



Cable color

Ground		black	GND
Positive		red	2.7 - 3.3, typ 3 V DC

Drawing

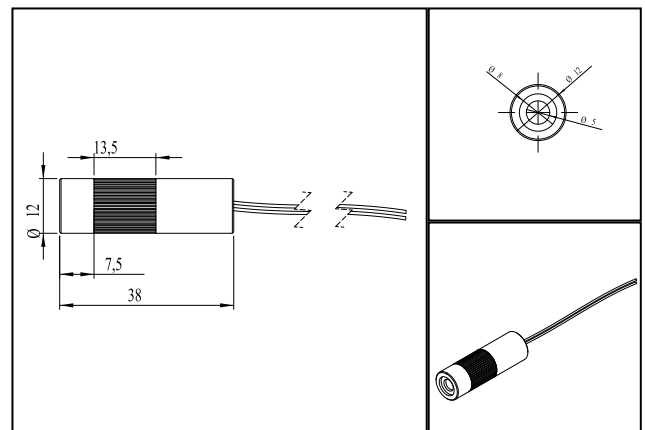

Safety Label



Valid Revision

1 | 28-FEB-2025