

DoE laser, green, 532nm, 6.2°, 5mW

DOE261-532-5-3(16x90)-NT

Order Number: 70111187

Main Parameters (*)	min	typ	max	Unit
Wavelength		532		nm
Optical Output Power		5		mW
Operating Voltage	2.7	3	3.3	V DC
Operating Current	125	250	375	mA
Operating Temperature	15		30	°C
Storage Temperature	-40		80	°C

Technical Parameters

Lifetime	>5000h
RoHS	yes

Optical Parameters

Beam Shape	DOE
Laser Class	2M
Divergence	D - 0.5mrad
Fan Angle	6.2°
Operating Distance	10m
Optics	acryl lense
Laser technology	Solid State (YVO4+KTP)
Stability	+/- 20% @ 15-30°C
Protection Lens	yes
Focus	fixed
Warm up time	<15min

Electrical Parameters

Potential of Housing	VDD(+)
Connector	2.5 mm DC plug (GND pole inner)
Power Supply	LFNT-3-C

Mechanical Parameters

Size	Ø16x90mm
Material	aluminium
Cable length	1360mm
Output Aperture	6mm
Housing Color	cyan
Weight	43g


(*) Over the complete operating temperature range

Features




- DOE Laser
- Image processing
- Laser Class 2M
- Compact size

Picture

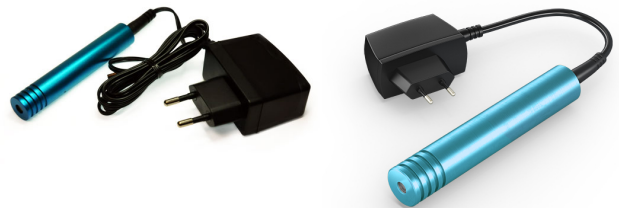

Safety Label



Revision

REV 1 | 21-JUN-2018