

Doe laser, infrared, 905 nm, 4 mW

DOE339-MDD905-4-3(12x38)-NT
Order Number: 70139525

Main Parameters (*)	min	typ	max	Unit
Wavelength		905		nm
Optical Output Power		4		mW
Operating Voltage	2.7	3	3.3	V DC
Operating Current	10	20	30	mA
Operating Temperature	-20		50	°C
Storage Temperature	-40		80	°C

Main Data

Warranty	1 years
----------	---------

Technical Parameters

Lifetime	> 5,000 h
RoHS	yes

Optical Parameters

Beam Shape	DOE
Laser Class	3R
Divergence	D - 0.5 mrad
Optics	glass lens AR coated
Laser technology	Single Mode Diode
Focus	adjustable

Electrical Parameters

Potential of Housing	isolated
Max. Mod. Frequency	100 kHz
Power Supply	Power Supply with stripped/tinned wires, Output: 3.3V DC, Input: 100-240V AC, 50-60Hz, Output Power: 3.3W max.

Mechanical Parameters

Size	Ø12x38 mm
Material	aluminium
Cable length	1,390 mm
Wire type	26AWG, 0,14mm ²
Output Aperture	5 mm
Housing Color	black
Weight	9.5 g

(*) Over the complete operating temperature range

Features



- Adjustable focus
- DOE optic can be changed
- Compact size
- Glas lenses anti reflex coated
- Operating Voltage 3V DC


Picture



Cable color

Ground		black	GND
Positive		red	2.7 - 3.3, typ 3 V DC
Modulation		yellow	100 kHz

Drawing

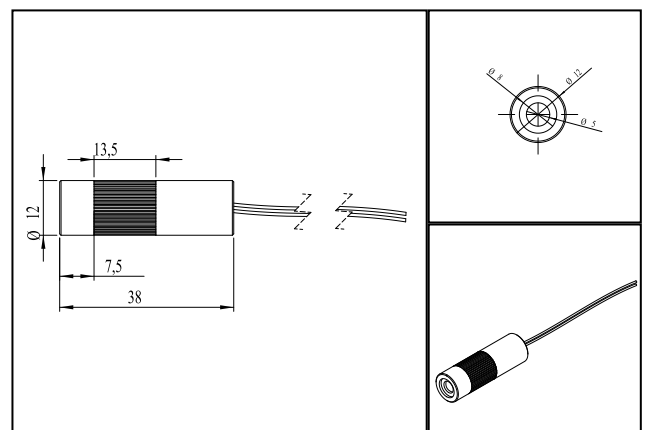

Safety Label



Valid Revision

| 14-JUN-2024