

Line laser, green, 532 nm, 90°, 10 mW

LD532-10-24(20x80)-70115666
Order Number: 70115666

Main Parameters (*)	min	typ	max	Unit
Wavelength		532		nm
Optical Output Power		10		mW
Operating Voltage	20	24	26.4	V DC
Operating Current	50	55	150	mA
Operating Temperature	15		30	°C
Storage Temperature	-40		80	°C

Main Data

Warranty	1 years
----------	---------

Technical Parameters

Lifetime	> 10,000 h
RoHS	yes

Optical Parameters

Beam Shape	Line
Laser Class	1
Divergence	D - 0.5 mrad
Fan Angle	90°
Line Thickness	<1mm@0.8m
Operating Distance	0.8m
Optics	glass lens AR coated
Beam Mode	TEM00
Laser technology	YVO4+KTP
Stability	+/- 20% @ 15-30°C
Protection Lens	no
Focus	fixed (800mm)
Warm up time	< 15 min

Electrical Parameters

Potential of Housing	isolated
Connector	CON_7000-08331-0000000

Mechanical Parameters

Size	Ø20x80 mm
Material	aluminium
Cable length	100 mm
Wire type	22AWG, black, 3,6mm
Output Aperture	6 mm
Weight	68 g

(*) Over the complete operating temperature range

Features




- Operating Voltage 24 V DC
- Isolated housing
- Laser Class 1
- Compact size


Picture



Cable color

Ground		black	GND
Positive		white	20 - 26.4, typ 24 V DC

Drawing

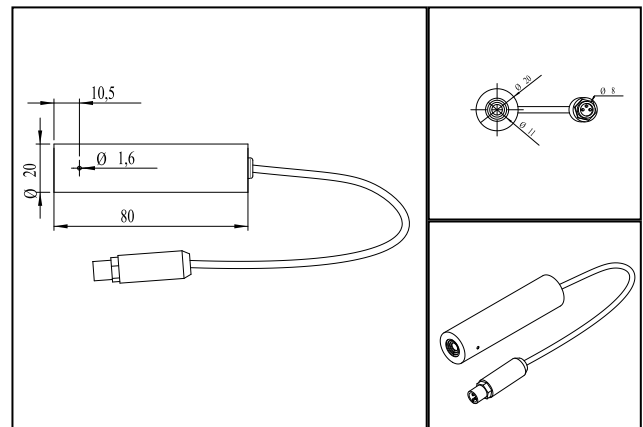

Safety Label



Valid Revision

1 | 27-APR-2022