

Line laser, red, 650 nm, 30°, 5 mW

LE650-5-3(20x75)30-C3000
Order Number: 70109894

Main Parameters (*)	min	typ	max	Unit
Wavelength		650		nm
Optical Output Power		5		mW
Operating Voltage	2.7	3	3.3	V DC
Operating Current	15	30	45	mA
Operating Temperature	-20		50	°C
Storage Temperature	-40		80	°C

Main Data

Warranty	1 years
----------	---------

Technical Parameters

Lifetime	> 10,000 h
RoHS	yes

Optical Parameters

Beam Shape	Line
Laser Class	1
Divergence	E - 0.6 mrad
Fan Angle	30°
Line Thickness	<1.5mm@3m
Operating Distance	5 m
Optics	glass lens AR coated
Laser technology	Single Mode Diode
Focus	fixed (3000mm)

Electrical Parameters

Potential of Housing	isolated
Power Supply	Power Supply with stripped/tinned wires, Output: 3.3V DC, Input: 100-240V AC, 50-60Hz, Output Power: 3.3W max.
Stripping of cable cover	50 mm

Mechanical Parameters

Size	Ø20x75 mm
Material	aluminium
Cable length	3,000 mm
Wire type	22AWG, black, 3,6mm
Output Aperture	5.5 mm
Housing Color	black
Weight	100 g
Stripping of wire	5 mm

(*) Over the complete operating temperature range

Features




- Operating Voltage 3 V DC
- Laser Class 1
- Uniform line thickness
- Fixed focus
- Glas lenses anti reflex coated


Picture



Cable color

Ground		black	GND
Positive		white	2.7 - 3.3, typ 3 V DC

Drawing

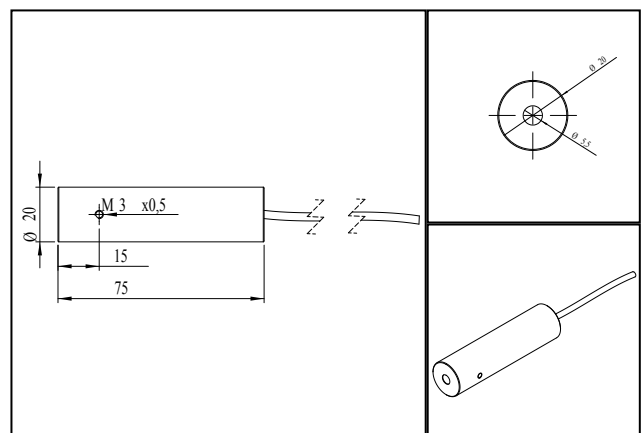

Safety Label



Valid Revision

8 | 22-JUL-2019