

Line laser, red, 650 nm, 20°, 4 mW

LI650-4-5(8X26)20DEG-F40-M8
Order Number: 70191110

Main Parameters (*)	min	typ	max	Unit
Wavelength		650		nm
Optical Output Power		4		mW
Operating Voltage	4.5	5	5.5	V DC
Operating Current		35		mA
Operating Temperature	-20		50	°C
Storage Temperature	-40		80	°C

Main Data

Warranty	1 years
----------	---------

Technical Parameters

Lifetime	> 10,000 h
RoHS	yes

Optical Parameters

Beam Shape	Line
Laser Class	1
Divergence	1 - 1.5 mrad
Fan Angle	20°
Line Thickness	<0.3mm@0.04m
Operating Distance	0.04 m
Optics	glass lens AR coated
Laser technology	diode
Focus	fixed (40mm)

Electrical Parameters

Potential of Housing	isolated
Connector	CON-M8-3POL

Mechanical Parameters

Size	Ø8x26 mm
Material	aluminium
Cable length	100 mm
Output Aperture	5.5 mm
Weight	3.5 g

(*) Over the complete operating temperature range

Features




Picture



Cable color

Ground		green	GND
Positive		red	4.5 - 5.5, typ 5 V DC

Drawing

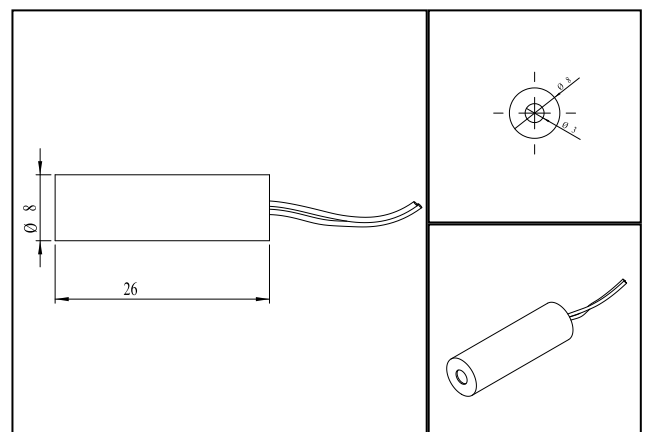

Safety Label



Valid Revision

| 01-DEC-2025