

Line laser, red, 670 nm, 90°, 5 mW

MLC670-5-5-F(14x45)
Order Number: 70110555

Main Parameters (*)	min	typ	max	Unit
Wavelength		670		nm
Optical Output Power		5		mW
Operating Voltage	4.5	5	5.5	V DC
Operating Current	20	35	55	mA
Operating Temperature	-20		50	°C
Storage Temperature	-40		80	°C

Main Data

Warranty	1 years
----------	---------

Technical Parameters

Lifetime	> 5,000 h
RoHS	yes

Optical Parameters

Beam Shape	Line
Laser Class	1
Divergence	C - 0.4 mrad
Fan Angle	90°
Line Thickness	adjustable
Operating Distance	2 m
Optics	glass lens AR coated
Laser technology	diode
Focus	adjustable

Electrical Parameters

Potential of Housing	isolated
Max. Mod. Frequency	200 kHz
Power Supply	Power Supply with stripped/tinned wires, Output: 5V DC, Input: 100-240V AC, 50-60Hz, Output Power: 3W max.

Mechanical Parameters

Size	Ø14x45 mm
Material	aluminium
Cable length	100 mm
Wire type	26AWG, 0,14mm ²
Output Aperture	4 mm
Weight	17 g

(*) Over the complete operating temperature range

Features



- Laser Class 1
- Image processing
- Adjustable focus
- Modulated
- Uniform line thickness


Picture



Cable color

Ground		black	GND
Positive		red	4.5 - 5.5, typ 5 V DC
Modulation		yellow	200 kHz

Drawing

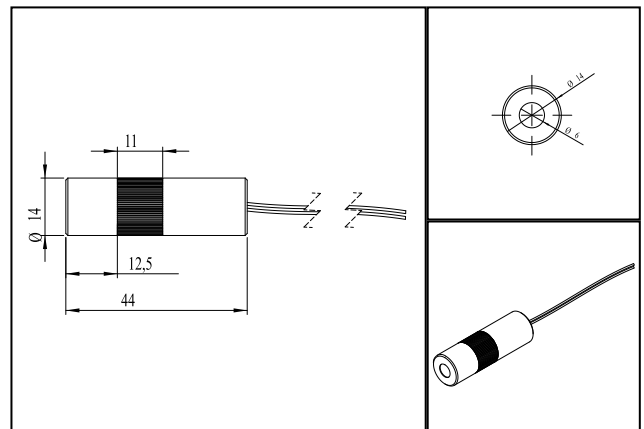

Safety Label



Valid Revision

9 | 26-APR-2023