

Line laser, green, 532 nm, 90°, 25 mW

MLD532-25-5(20x80)
Order Number: 70101416

Main Parameters (*)	min	typ	max	Unit
Wavelength		532		nm
Optical Output Power		25		mW
Operating Voltage	4.5	5	5.5	V DC
Operating Current	250	450	600	mA
Operating Temperature	15		30	°C
Storage Temperature	-40		80	°C

Main Data

Warranty	1 years
----------	---------

Technical Parameters

Lifetime	> 5,000 h
RoHS	yes

Optical Parameters

Beam Shape	Line
Laser Class	2M
Divergence	D - 0.5 mrad
Fan Angle	90°
Line Thickness	<2.5mm@10m
Operating Distance	10 m
Optics	glass lens AR coated
Beam Mode	TEM00
Laser technology	YVO4+KTP
Stability	+/- 20% @ 15-30°C
Focus	fixed (10.0m)
Warm up time	< 15 min

Electrical Parameters

Potential of Housing	isolated
Max. Mod. Frequency	10 kHz

Mechanical Parameters

Size	Ø20x80 mm
Material	aluminium
Cable length	100 mm
Wire type	26AWG, 0,14mm ²
Output Aperture	5 mm
Housing Color	black
Weight	55g

(*) Over the complete operating temperature range

Features



- Laser Class 2M
- High Power
- Modulated


Picture




Cable color

Ground		black	GND
Positive		red	4.5 - 5.5, typ 5 V DC
Modulation		yellow	10 kHz

Drawing

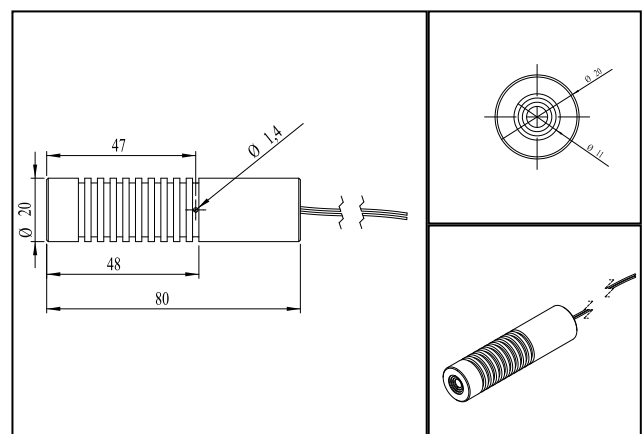

Safety Label



Valid Revision

5 | 23-FEB-2021