

Doe laser, red, 635 nm, 5 mW

DOE231-635-5-24-F(16x62)
Order Number: 70138733

Main Parameters (*)	min	typ	max	Unit
Wavelength		635		nm
Optical Output Power		5		mW
Operating Voltage	23.5	24	24.5	V DC
Operating Current	5	12	30	mA
Operating Temperature	-20		50	°C
Storage Temperature	-40		80	°C

Stammdaten

Warranty 1 Jahre

Technical Parameters

Lifetime >10000 h
RoHS yes

Optical Parameters

Beam Shape	DOE
Laser Class	1M
Divergence	D - 0.5 mrad
Operating Distance	2 m
Optics	glass lens AR coated
Laser technology	Single Mode Diode
Stability	+/- 3% @ -10-50°C
Focus	adjustable

Electrical Parameters

Potential of Housing isolated
Stripping of cable cover 50 mm

Mechanical Parameters

Size	Ø16x62 mm
Material	aluminium
Cable length	300 mm
Wire type	18AWG, black, 3,6mm
Output Aperture	5 mm
Housing Color	black
Weight	30 g
Stripping of wire	5 mm

(*) Over the complete operating temperature range

Features





- Adjustable focus
- DOE optic can be changed
- Compact size
- Glas lenses anti reflex coated
- Operating Voltage 24 V DC


Picture




Cable color

Ground		black	GND
positive		white	23.5 - 24.5, typ 24 V DC

Drawing

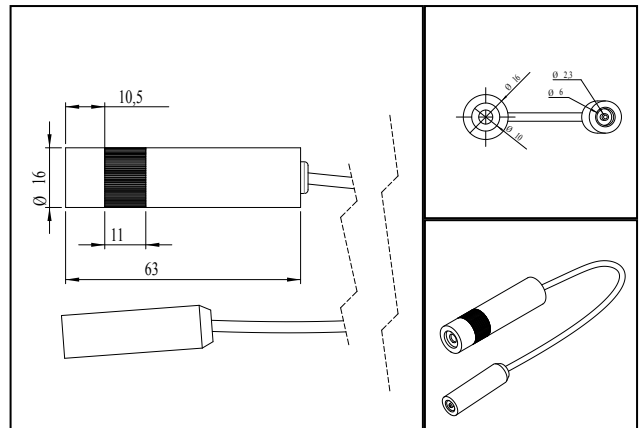

safety label



Valid Revision

| 13-MAY-2019