

Dot laser, red, 635 nm, 1 mW

DDI635-1-24(12x45)-C500
Order Number: 70113204

Main Parameters (*)	min	typ	max	Unit
Wavelength		635		nm
Optical Output Power		1		mW
Operating Voltage	21.6	24	26.4	V DC
Operating Current	3	7	15	mA
Operating Temperature	-20		50	°C
Storage Temperature	-40		80	°C

Main Data

Warranty	1 years
----------	---------

Technical Parameters

Lifetime	> 5,000 h
RoHS	yes

Optical Parameters

Beam Shape	Dot
Laser Class	2
Divergence	D - 0.5 mrad
Size of Laserdot	adjustable
Operating Distance	10 m
Optics	glass lens AR coated
Laser technology	Single Mode Diode
Focus	adjustable

Electrical Parameters

Potential of Housing	isolated
----------------------	----------

Mechanical Parameters

Size	Ø12x45 mm
Material	aluminium
Cable length	500 mm
Wire type	Belden, Typ 1007, 26AWG
Output Aperture	5 mm
Housing Color	black
Weight	15 g
Stripping of wire	5 mm

(*) Over the complete operating temperature range

Features



- Glas lenses anti reflex coated
- Isolated housing
- Laser Class 2
- Operating Voltage 24 V DC
- Small package


Picture



Cable color

Ground		black	GND
Positive		red	21.6 - 26.4, typ 24 V DC

Drawing

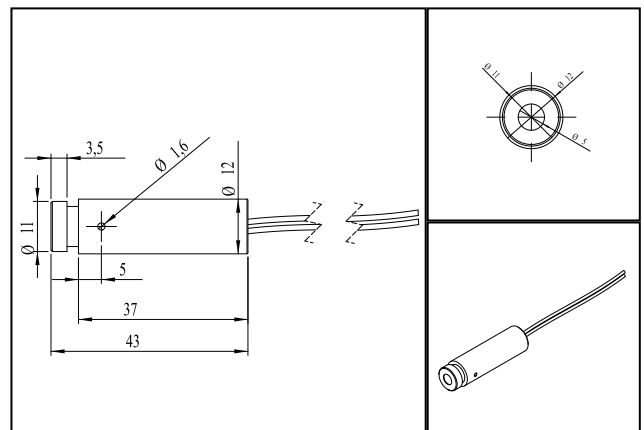

Safety Label



Valid Revision

3 | 25-MAR-2021