



Cross laser, red, 635 nm, 45°, 3.5 mW

LFC635-5-5(9x20)45
Order Number: 70141726

Main Parameters (*)	min	typ	max	Unit
Wavelength		635		nm
Optical Diode Power	2	3.5	5	mW
Operating Voltage	2.8	5	5	V DC
Operating Current	15	40	60	mA
Operating Temperature	-20		40	°C
Storage Temperature	-40		80	°C

Main Data

Warranty	1 years
----------	---------

Technical Parameters

Lifetime	>3,000 h
RoHS	yes

Optical Parameters

Beam Shape	Cross
Laser Class	1
Divergence	H - 1.0 mrad
Fan Angle	45°
Line Thickness	<1.2mm@1m
Operating Distance	2 m
Optics	acryl lense
Laser technology	diode
Focus	fixed (1000mm)
Verticality	< ±1°

Electrical Parameters

Potential of Housing	VDD(+)
Power Supply	Power Supply with stripped/tinned wires, Output: 5V DC, Input: 100-240V AC, 50-60Hz, Output Power: 3W max.

Mechanical Parameters

Size	Ø9x20 mm
Material	Brass
Cable length	100 mm
Wire type	26AWG, 0,14mm ²
Output Aperture	6 mm
Weight	6 g

(*) Over the complete operating temperature range

Features




Picture



Cable color

Ground		black	GND
Positive		red	2.8 - 5, typ 5 V DC

Drawing

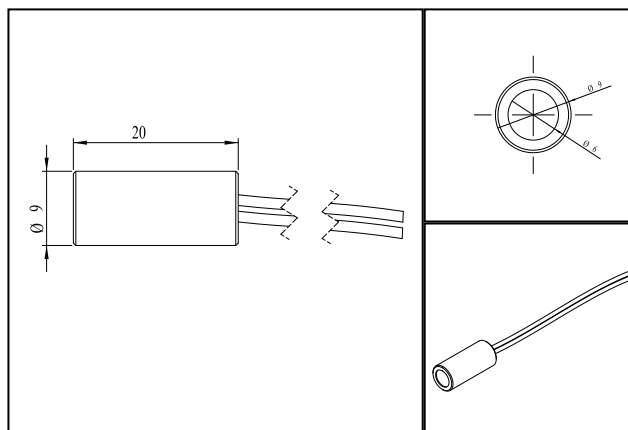

Safety Label



Valid Revision

| 29-JUL-2024